



SUPER-RAPIDEX®

For NC/CNC Machines

- The SUPER-RAPIDEX® is operated by using any tool from the machine with a programmed Z-axis motion
- Does not require an M-function operation nor 4th axis capability

For Pallet Chargers


- The SUPER-RAPIDEX® is designed to be used with manual and automatic pallet changers
- The SUPER-RAPIDEX® allows 24-HOUR operation
- Automatic indexing enables you to operate CNC Machining Centres continuously

For Manual Operation

- Easy and fast setup on the machine with the handle (standard accessory)
- The SUPER-RAPIDEX® is used as the manual indexer


Features:

- Simple indexing
- Maintenance free design, thrives in harsh environments
- Heavy and off-centre cutting presents a rigidity problem for indexers
- Over 1 ton of positive clamping force the Super Rapidex® solves this problem

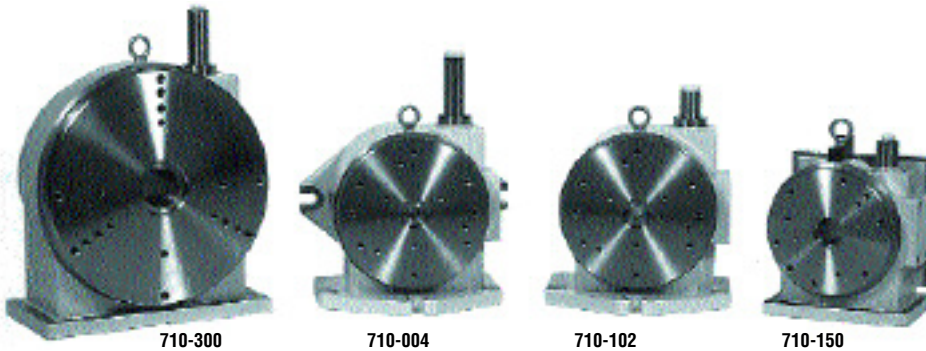

SUPER-RAPIDEX®			
Model No.	Angle Index	Code No.	Price \$
710-002	15°	325-615	8,522.20
710-004	90°	325-620	15,600.60
710-102	15°	325-621	8,143.00
710-104	90°	325-622	9,470.10
710-150	45°	325-623	7,868.10
710-300	45°	325-624	16,484.90

TOLERANCE	
Table centre hole cut	0.0004" (0.01 mm)
Table surface runout	0.0004" (0.01 mm)
Table surface squareness	0.0004" (0.03 mm)
Load Tolerance	18 lbs. (8 Kg)
Indexing accuracy	±30 sec.

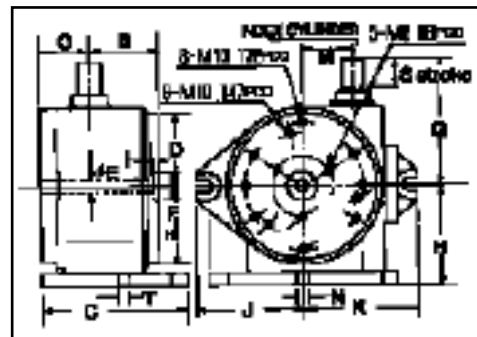

Model No.	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T
710-002	-	3.86	8.03	8.27	0.65	1.57	-	5.31	0.24	5.91	6.30	-	2.76	0.65	2.72	-	6.38	-	1.38	0.65
710-004	-	3.86	8.03	8.27	0.65	1.57	-	5.31	0.24	5.91	6.30	-	2.76	0.65	2.72	-	8.19	-	3.07	0.65
710-102	-	3.86	8.46	8.27	0.65	1.57	0.79	5.31	0.24	-	-	-	2.76	0.65	1.93	10.24	6.38	1.46	1.38	0.65
710-104	-	3.86	8.46	8.27	0.65	1.57	0.79	5.31	0.24	-	-	-	2.76	0.65	1.93	10.24	8.19	1.46	3.07	0.65
710-150	5.94	3.74	5.94	6.69	1.46	1.57	0.67	4.72	0.24	3.58	4.29	9.72	2.16	-	-	-	-	-	1.50	-
710-300	6.97	-	-	12.20	2.05	2.76	0.79	7.28	0.24	6.30	6.46	16.46	4.21	0.71	-	-	-	-	2.95	-