




### SUDX AND EUDX 5C STYLE MODELS (SINGLE SPINDLE)

#### Standard Accessories


- UDNC 100 Controller (SUDX) UDNC 500 (EUDX)
- Remote cable (for M-Code interface, 15 ft.)
- Power Cord (110 VAC, SUDX) (220 VAC, EUDX)
- Operators Manual, Warranty Card, Locating Keys
- T-Slotted Face Plate (removable, for 132-5C(L))
- Manual 5C Collet Closer (5C and 132-5C(L))
- Air Operated 5C Collet Closer (5CA)
- PC programming software

#### Optional Accessories

- Handwheels (SPG-100, LPG-200)
- Hand Computer Terminal (HCT-001, HCT-002)
- Terminal Cable for HCT (TIC-002)
- Air Collet Closer (for 132-5C), chucks, etc.
- Tailstocks, (manual and air operated)
- Remote quill switch (RQS-100) for manual mills

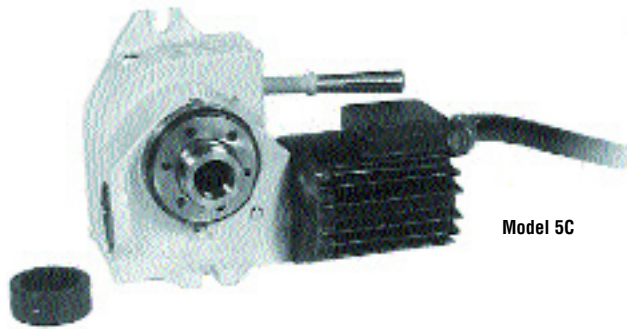

Model 5C

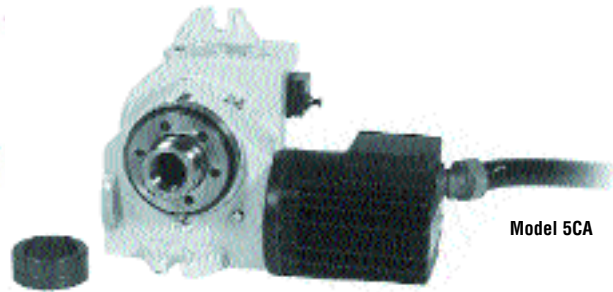


Model 5CA



UDNC-500 (EUDX)



UDNC-100 (SUDX)

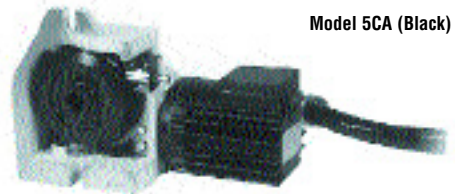

Model 5CA (Black)

■ SUDX AND EUDX 5C STYLE MODELS (SINGLE SPINDLE)				
Model SUDX/EUDX Code No.	5C 338-065	5CA 338-002	132 5C 338-004	132-5CL 338-080
Sub Table	O.D. Bore I.D. Threaded I.D.	5C Type N/A N/A		5.20 (5C) (132) 0.98 (25) M20 P 2.5
Centre Height			4.33 (110)	
Max rpm			62	
Rotational Torque	SUDX EUDX		40 ft. lbs. (5.5 kg/m) 90 ft. lbs. (12 kg/m)	
Spindle Brake Torque		N/A		45 ft. lbs. (6 kgm)
Resolution Deg.			0.000625"	
Max Load Horizontal (Indexer position)			44 lbs. (20 kg)	
Max Load Vertical (Indexer position)		22 lbs. (10 kg)		
Positioning Accuracy			±30 seconds	
Repeatability			10 seconds	
Motor Type			DC Servo (SUDX) AC Servo (EUDX)	
Setting Position			Horizontal / Vertical	
Thru Hole Dia. (Spindle)			1.114 (28.30)	
Spindle Runout			.0005 (0.01)	
Spindle Type		2-3/16" - 10 (Harding)		(5C) 132mm F.P.
Net Weight		60.6 lbs. (27.55 kg)		71.7 lbs. (32.60 kg)
Price \$	11,366.00	22,023.58	13,072.30	13,072.30