




## Mold Max Face Mill

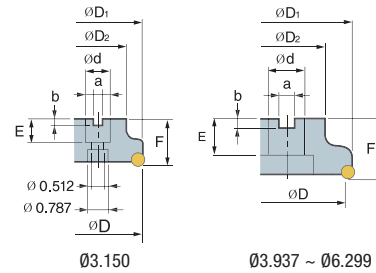

(inch)

Designation	Code No.				ØD	Ød	ØD <sub>1</sub>	ØD <sub>2</sub>	a	b	E	F	No. of Inserts
	R	Price \$	L	Price \$									
MMFM 4050R/L	146997	<b>384.97</b>			1.969(50)	0.750	-	1.750	0.321	0.220	0.750	1.620	4
4080R/L	146125	<b>625.35</b>			3.150(80)	1.000	3.646	2.126	0.384	0.248	0.984	1.969	5
4100R/L	146126	<b>806.71</b>			3.937(100)	1.250	4.433	2.756	0.500	0.315	1.260	1.969	6
4125R/L	148259	<b>791.64</b>			4.921(125)	1.500	5.417	2.953	0.626	0.394	1.496	2.480	7
4160R/L	148260	<b>1,025.82</b>			6.299(160)	2.000	6.795	3.937	0.748	0.433	1.496	2.480	8

### Available Insert


<p>RPMM</p>	<p>Designation</p> <p><b>RPMM 120400</b></p>
-------------	--

➤ P. E98

### Parts

Screw		Wrench	
FTNC 04511	146424 <b>\$ 8.76</b>	TW20S	147216 <b>\$ 43.35</b>

### Assembling



## 45° Chamfer Mill



Kits Also Available

➤ P. E167

Designation	Chamfer Range	Code No.	Price \$	Shank	No. of Inserts	Insert
CT 45 - 0.625	0.125" - 0.625" 45°	147113	<b>425.39</b>	3/4	1	TC_T 21.5_
CT 45 - 1.125	0.470" - 1.125" 45°	147112	<b>239.41</b>	3/4	2	TC_T 32.5_

➤ P. E22-24

### Parts

Screw		Wrench	
FTKA02565	146930 <b>\$ 14.61</b>	TW08P	146596 <b>\$ 15.11</b>
*FTGA03510	146957 <b>\$ 13.86</b>	*TW15P	146940 <b>\$ 17.45</b>

### Recommended Cutting Condition

Workpiece	Cutting Condition		Grade
	V(sfm)	f(ipf)	
P	490~980 230~590	0.003~0.012	Coated (PM25C, PM30P) Uncoated (PM20U)
M			
K			

**M & K Class grades available, none are stock standard**