



CAT40 Shell Mill Holders



- DIN coolant option - standard
- All ground body, nose, pilot, flange
- TIR, 0.0001" / 0.003mm OD to ID
- AT2 Taper Accuracy
- Certified Steel
- RFID chip hole






Taper	d	L	D	L1	Key Size	Arbor Thread	Code No.	Price \$
CT40	1/2	1.75	1.38	0.57	1/4	1/4-28	531190	220.76
CT40	3/4	1.75	1.75	0.67	5/16	3/8-24	531192	199.93
CT40	3/4	4.00	1.75	0.67	5/16	3/8-24	531194	267.95
CT40	3/4	6.00	1.75	0.67	5/16	3/8-24	531195	301.29
CT40	1	1.75	2.38	0.67	3/8	1/2-20	531196	199.93
CT40	1	4.00	2.38	0.67	3/8	1/2-20	531198	267.95
CT40	1	6.00	2.38	0.67	3/8	1/2-20	531199	301.29
CT40	1-1/4	2.00	2.88	0.67	1/2	5/8-18	531200	212.43
CT40	1-1/4	4.00	2.88	0.67	1/2	5/8-18	531202	301.29
CT40	1-1/4	6.00	2.88	0.67	1/2	5/8-18	531203	309.62
CT40	1-1/2	2.00	3.80	0.93	5/8	3/4-16	531204	234.64
CT40	1-1/2	4.00	3.80	0.93	5/8	3/4-16	531206	336.00

CAT40 DUAL CONTACT Shell Mill Holders



- DIN coolant through the flange option - Standard
- Improves rigidity and reduces vibration allowing for increased feed rates and increased tool life
- All ground body, nose, pilot, flange
- TIR, 0.0001" / 0.003mm OD to ID
- AT2 Taper Accuracy
- Certified Steel
- RFID chip hole


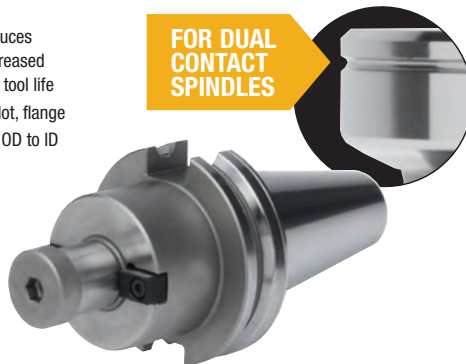


Taper	d	L	D	L1	Key Size	Arbor Thread	Code No.	Price \$
CT40	3/4	1.75	1.75	0.67	5/16	3/8-24	521192	239.60
CT40	3/4	4.00	1.75	0.67	5/16	3/8-24	521194	348.08
CT40	3/4	6.00	1.75	0.67	5/16	3/8-24	521195	388.61
CT40	1	1.75	2.38	0.67	3/8	1/2-20	521196	244.38
CT40	1	4.00	2.38	0.67	3/8	1/2-20	521198	348.08
CT40	1	6.00	2.38	0.67	3/8	1/2-20	521199	394.57
CT40	1-1/4	2.00	2.88	0.67	1/2	5/8-18	521200	262.26
CT40	1-1/4	4.00	2.88	0.67	1/2	5/8-18	521202	405.31
CT40	1-1/2	2.00	3.80	0.93	5/8	3/4-16	521204	286.09
CT40	1-1/2	4.00	3.80	0.93	5/8	3/4-16	521206	429.14

CAT50 Shell Mill Holders



- DIN coolant option - Standard
- All ground body, nose, pilot, flange
- TIR, 0.0001" / 0.003mm OD to ID
- AT2 Taper Accuracy
- Certified Steel
- RFID chip hole





Taper	d	L	D	L1	Key Size	Arbor Thread	Code No.	Price \$
CT50	3/4	1.75	2.00	0.67	5/16	3/8-24	531208	238.81
CT50	3/4	4.00	2.00	0.67	5/16	3/8-24	531210	309.62
CT50	3/4	6.00	2.00	0.67	5/16	3/8-24	531212	397.08
CT50	3/4	8.00	2.00	0.67	5/16	3/8-24	531214	492.88
CT50	1	1.75	2.75	0.69	3/8	1/2-20	531216	248.53
CT50	1	4.00	2.75	0.69	3/8	1/2-20	531218	336.00
CT50	1	6.00	2.75	0.69	3/8	1/2-20	531220	431.79
CT50	1	8.00	2.75	0.69	3/8	1/2-20	531222	492.88
CT50	1-1/4	1.75	2.88	0.69	1/2	5/8-18	531224	283.24
CT50	1-1/4	4.00	2.88	0.69	1/2	5/8-18	531226	336.00
CT50	1-1/4	6.00	2.88	0.69	1/2	5/8-18	531228	431.79
CT50	1-1/4	8.00	2.88	0.69	1/2	5/8-18	531230	526.21
CT50	1-1/2	2.00	3.80	0.93	5/8	3/4-16	531232	283.24
CT50	1-1/2	4.00	3.80	0.93	5/8	3/4-16	531234	336.00
CT50	1-1/2	6.00	3.80	0.93	5/8	3/4-16	531236	431.79
CT50	1-1/2	8.00	3.80	0.93	5/8	3/4-16	531238	562.30
CT50	2	2.00	4.38	0.93	3/4	1-14	531240	355.43
CT50	2	4.00	4.38	0.93	3/4	1-14	531242	634.50
CT50	2	6.00	4.38	0.93	3/4	1-14	531244	763.62

CAT50 DUAL CONTACT Shell Mill Holders



- DIN Coolant through the flange option - Standard
- Improves rigidity and reduces vibration allowing for increased feed rates and increased tool life
- All ground body, nose, pilot, flange
- TIR, 0.0001" / 0.003mm OD to ID
- AT2 Taper Accuracy
- Certified Steel
- RFID chip hole



Taper	d	L	D	L1	Key Size	Arbor Thread	Code No.	Price \$
CT50	3/4	1.75	2.00	0.67	5/16	3/8-24	521208	317.09
CT50	3/4	4.00	2.00	0.67	5/16	3/8-24	521210	400.54
CT50	3/4	6.00	2.00	0.67	5/16	3/8-24	521212	500.66
CT50	3/4	8.00	2.00	0.67	5/16	3/8-24	521214	600.66
CT50	1	1.75	2.75	0.69	3/8	1/2-20	521216	290.86
CT50	1	4.00	2.75	0.69	3/8	1/2-20	521218	429.14
CT50	1	6.00	2.75	0.69	3/8	1/2-20	521220	536.42
CT50	1	8.00	2.75	0.69	3/8	1/2-20	521222	665.17
CT50	1-1/4	1.75	2.88	0.69	1/2	5/8-18	521224	290.86
CT50	1-1/4	4.00	2.88	0.69	1/2	5/8-18	521226	429.14
CT50	1-1/4	6.00	2.88	0.69	1/2	5/8-18	521228	536.42
CT50	1-1/4	8.00	2.88	0.69	1/2	5/8-18	521230	665.17
CT50	1-1/2	2.00	3.80	0.93	5/8	3/4-16	521232	317.09
CT50	1-1/2	4.00	3.80	0.93	5/8	3/4-16	521234	429.14
CT50	1-1/2	6.00	3.80	0.93	5/8	3/4-16	521236	536.42
CT50	1-1/2	8.00	3.80	0.93	5/8	3/4-16	521238	665.17
CT50	2	2.00	4.38	0.93	3/4	1-14	521240	544.77
CT50	2	4.00	4.38	0.93	3/4	1-14	521242	766.51