







AP 16 Chamfer Mills

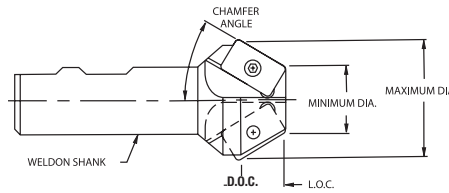


(inch)

Designation	Code No.	Price \$	Min. Dia.	Max. Dia.	Weldon Shank	Chamfer Angle	No. of Inserts	Depth of Cut
AP 16 CHM	750-30	147187	209.88	0.750	1.303	3/4"	2	0.479
	688-41	147188	209.88	0.688	1.414	3/4"		0.418
	688-45	147189	209.88	0.688	1.471	3/4"		0.391
	500-60	147190	209.86	0.500	1.458	3/4"		0.277
1.000-30	147191	229.16	1.000	1.553	1"	30°	3	0.479
	938-41	147192	229.16	0.938	1.664	41°		0.418
	938-45	147193	229.16	0.938	1.721	45°		0.391
	750-60	147194	229.16	0.750	1.708	60°		0.277
1.250-30	147195	280.55	1.250	1.803	1 1/4"	30°	3	0.479
	1.188-41	147196	280.55	1.188	1.914	41°		0.418
	1.188-45	147197	280.55	1.188	1.971	45°		0.391
	1.000-60	147198	280.55	1.000	1.958	60°		0.277
1.500-30	147199	359.71	1.500	2.053	1 1/2"	30°	3	0.479
	1.438-41	147200	359.71	1.438	2.164	41°		0.418
	1.438-45	147201	359.71	1.438	2.221	45°		0.391
	1.250-60	147202	359.71	1.250	2.208	60°		0.277

Parts

Designation	Insert	Screw	Wrench
AP16 CHM	 APLT 347	 FTKA 0410	 TW 15S
		146969 \$ 9.48	146801 \$ 34.98

APLT-347

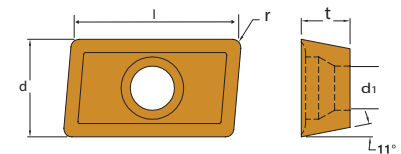

Designation	Coated Carbide										Uncoated Carbide		(inch)					Applicable Cutter	
	PM10C	PM25C	PM30C	PM25P	PM35P	PM40P	KM30P	MM30P	MT30P	SM20P	PM20U	KTM20U	l	d	t	r	d1	Cutter	Page No.
APLT 347		149195 \$ 30.76	149194 \$ 31.40									149196 \$ 26.06	0.591	3/8	0.187	0.015	0.173	AP16 CHM	

Quick Choice Grade Selection

P Steel	M Stainless Steel	K Cast Iron - Alum	S Heat Resistant Alloy
------------	----------------------	-----------------------	---------------------------