GS160G 6" Precision Milling Machine Vise

This vise has been redesigned with new industry leading workholding features.

- Jaw opening: 9.13" / 232mm
- Bed height: 2.875" ±0.0005"
- · Weight: 68lbs / 31kg
- Narrower body style to allow more vises on a machine table
- The bearing pack has been relocated to help reduce oil/water/chip leakage into the vise body
- The thrust bearings have been replaced with ball bearings to make the pack stronger and more stable
- Spherical segment creates all-directional alignment and reduces jaw lift for improved performance

10 YEAR WARRANTY!

- · Spindle does not protrude past the end of the body
- Brush seal design
- Perpendicularity (running face and jaw plate): 0.0004"
- Parallelism (running face to bottom of bed): 0.0006"
- Material: FCD-60 (80,000psi)
- Stationary jaw: 4 bolt stationary design reduces lift
- Pull-type design: Reduces stress on body during clamping
- Chip evacuation: Straight through the body on sides and ends. Locations strategically chosen to not reduce body strength
- Max. Clamping Force: 30378 ft/lbs




| /1 | n | _ | h |
|----|---|---|---|

| Model | Code No. | Price \$ |
|--|----------|----------|
| GS160G | 327320 | 950.00 |
| #2 Main Screw | 327322 | 139.07 |
| #4 Sliding Spindle Nut | 327324 | 153.55 |
| #5 Movable Jaw | 327326 | 175.92 |
| #6 Fixed Jaw | 327328 | 151.55 |
| #7 Jaw Plate (2pcs) | 327330 | 112.74 |
| Repair Kit - consists of #8 segment, #20 bearing, #21 o-ring, 2pc #10 brush, 2pc #19 c-clip | 327332 | 70.09 |
| Handle Assembly - consists of #11 socket, #12 bar, #13 pin | 327334 | 66.27 |
| #14 Slide Cover (Back) | 327336 | 9.23 |
| #14 Slide Cover (Front) | 327338 | 17.78 |
| #16 Bolt for Jaw Plate (piece) | 327340 | 4.61 |
| #17 Bolt (long) for Fixed Jaw | 327342 | 4.58 |
| #18 Bolt (short) for Fixed Jaw | 327344 | 4.61 |

| Α | В | C | D | E | F | G | Н | I | J | K | L | М | N | 0 | T | U | Weight | Code No. | Price \$ |
|-----|-----|-----|-----|---------|----|-------|--------|------|-------|-------|-------|------|----|-----|------|------|--------|----------|----------|
| 427 | 186 | 151 | 466 | 111.025 | 39 | 90.53 | 73.025 | 58.7 | 18.42 | 17.46 | 101.6 | 44.5 | 19 | 232 | 23.8 | 98.4 | 31ka | 327320 | 950.00 |


Capacity




GSV60 6" Versatile Vise

- 6" vise with 6-1/2" opening
- High accuracy vise for single station CNC centres specially designed to prevent workpiece lift
- 2 operating positions for Vertical Machine Centres: Upright & Lay Down
- 1 operating position for Horizontal Machine Centres: Horizontal
- Bed height: 81mm ±0.012mm (3.189" ±0.0005")
- Material: FCD-60
- Weight: 68lbs / 31kg

LIFETIME WARRANTY!



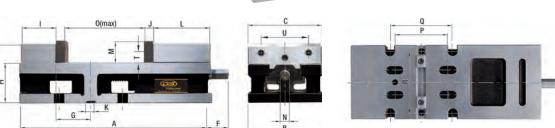

| Α | В | C | D | Ε | F | G | Н | - 1 | J | K | L | M | N | 0 | P | Q | R | T | U | Weight | Code No. | Price \$ |
|-----|--------|-----|-------|-------|------|-------|----|------|----|----|-------|------|----|-----|--------|-----|-----|------|------|--------|----------|----------|
| 385 | 152.45 | 151 | 431.8 | 118.7 | 46.8 | 69.84 | 81 | 69.9 | 18 | 18 | 114.3 | 44.5 | 19 | 163 | 107.95 | 127 | 127 | 23.8 | 98.4 | 31kg | 382620 | 1,350.00 |